


► Stand-Alone Fingerprint Access Control System

Realtime TD1D

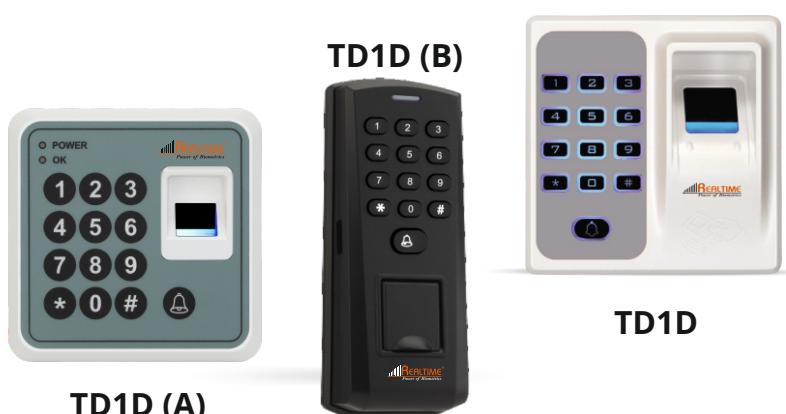

Specifications

» Fingerprint	500
» Card	500
» PIN	500
» Operating Voltage	12V DC
» Idle Current	< 50 mA
» Active Current	< 100 mA
» Fingerprint Reader	Optical fingerprint Module
» Resolution	500 DPI
» Identification time	< 1S
» FAR	< 0.0001%
» FRR	< 0.01%
» Proximity Card Reader	Industry Standard 26 bit
» Radio Technology	125KHz Industry Proximity EM Card
» Read Range	1 ~ 5 cm
» PIN Reader	4~ 6 digits PIN
» Wiring Connections	Relay output, exit button, alarm,Wiegand output
» Door Bell	Support
» Communication	USB for downloading/uploading
» Adjustable Relay Output Time	1 ~ 99 Seconds (5 seconds default)
» Lock Output Load	(NO, NC, Common)
» Wiegand	Wiegand 26 bits output
» Operating Temperature	-20°C ~ 50°C (50°F ~ 140°F)
» Operating Humidity	20% RH ~ 90% RH
» Physical	ABS Enclosure

